



532 Tower Lane, Claremore, OK 74019
 PHONE (877)-728 3278 FAX (877)-203-1998
 (A Division of Acme Manufacturing Corp.)

Equipment Support Rails Types FEQS, FEQC & FEQRC

STANDARD FEATURES

Custom made to specific requirements. Offered in any height and length and in widths from 3½" to 12".

Continuous welded seams for extra strength and water tightness with an 18 ga. galv. steel support shell, base plate and counter flashing cap.

Internal reinforcing on 12 to 24" centers as required.

Offered with Type RF roof-over-flashing with integral base plate and 3" wide 45° cant or with specific raised cant.



Also offered with Type SF self-flashing base plate.

Standard wood nailer consists of 2 x 4" lumber secured to top ledge of support.

PROJECT	
LOCATION	
ARCHITECT	
ENGINEER	
CONTRACTOR	
SUBMITTED BY	
DATE	PO#

OPTIONS

- Special reinforcing.
- Heavy-gage construction.
- Heights from 8" to 24".
- Raised cant 1½" to 4".
- Single or double pitch.
- Wood nailer of specific dimensions and length
- Protective or decorative coatings.

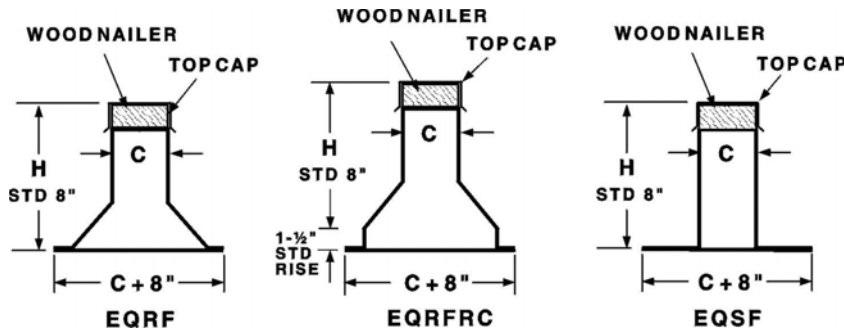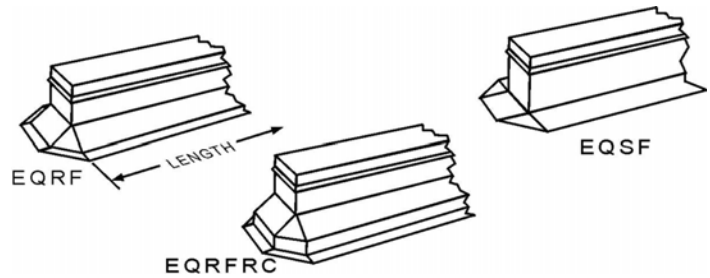

SPECIFICATIONS AND DIMENSIONS

REFERENCE	QUAN.	TYPE (RF,SF or RFRC)	LENGTH	C	H	RISE	OPTIONS