



ACME MANUFACTURING CORP.
 6532 TOWER LANE, CLAREMORE, OK 74018
 Phone (918) 266-3097 Fax (918) 266-3091
ENGINEERED PRODUCTS BY CRAFTSMEN

Wall Louver High Performance 4" Drainable Blade GALV. STEEL Type LWJ4-G

FEATURES




- Economical formed galvanized steel construction.
- High free area, low pressure drop, low water penetration.
- Integral top drain to remove wetted wall water.
- Drain gutters in each blade with downspouts in jambs and mullions to drain water.
- Channel frame or flange frame construction.

STANDARD CONSTRUCTION

- Frame of 18 Ga. galvanized steel 4" deep with mill finish.
- 4" drainable blades positioned at 45° angle, spaced 3-7/8" center to center and formed of 18 Ga. galvanized steel.
- All fasteners HD Galv.
- 19 Ga. galvanized steel 1/2" mesh screen in removable frame rear mounted. (Adds 3/8" to depth.)
- Minimum size: 12" x 12"; Maximum single section: 72" (w) x 120" (h)
- Sizes over 84" in either dimension ship KD for field assembly.

OPTIONS

- Variety of bird and insect screens.
- Extended sill or subframe.
- Washable aluminum filters or filter rack only.
- Front or rear security bars.
- Prime or color finish.
- All welded construction.
- Heavy gage construction.

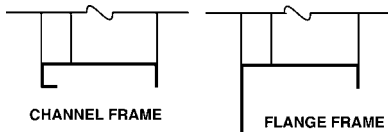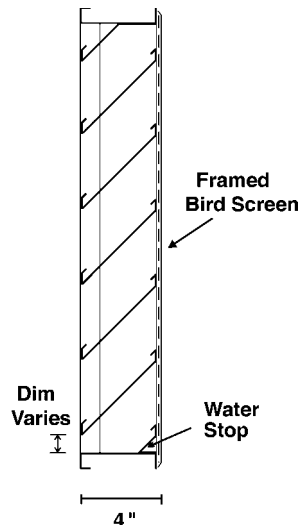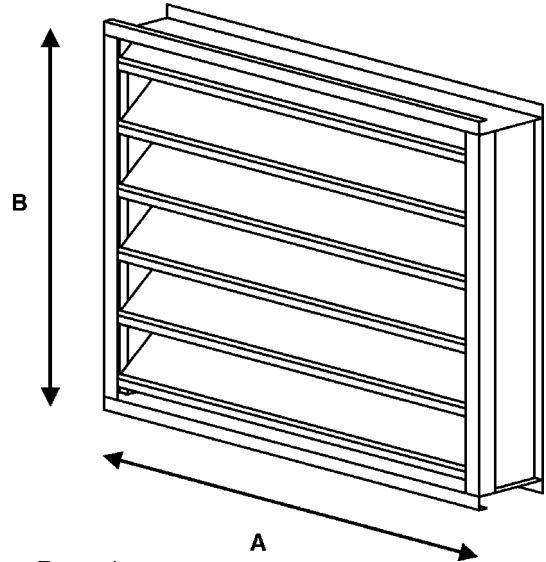

!
!

SPECIFICATIONS AND DIMENSIONS

REF.	QUAN.	A Wide	B High	Frame Type	OPTIONS

Project: Architect/Engineer: Contractor:	Date: Submitted by: Other info:
---	--